

Servo Amplifier

Synchronous Drive
penny-motor® Technology

For combination with
Micro Brushless DC-Motors:
0206, 0308, 0515, 1202
Brushless Gearmotors:
1307, 1309

Series BLD 05002 S

	BLD 05002 S	
Power supply	2,7 ... 5,5	V DC
PWM switching frequency	500	kHz
Continuous output current @ TA = 22°C	250	mA
Total standby current	15	mA
Steps per revolution with pole-pair 1 (0206, 0308, 0515)	48	
Steps per revolution with pole-pair 4 (1202, 1307, 1309)	192	
Temperature range:		
– Operating temperature	0 ... +70	°C
– Storage temperature	–20 ... +80	°C
Dimension and Weight:		
– Dimension (L x W x H)	10,2 x 10,2 x 2,8	mm
– Weight	0,6	g

Note: The Servo Amplifier is supplied with an operating instruction manual for installation and start-up.
A Test board with adjustable oscillator and integrated motor mounts is available separately.

General Information

The Series BLD 05002 S is an electronics with sine form output voltage for synchronous micromotors.

At $V_m < 0,8$ V the PWM outputs are deactivated (the motor is switched off). A current regulation is not provided.

The motor voltage is set with an analogous control voltage at input "V_m". It is calculated from the supply voltage V_{cc} and the voltage at V_m to:

The circuit is set-up as plug-in hybrid component for DIL-8 socket.

$$V_{\text{Motor}} = (V_m - V_{\text{cc}}/2) \cdot 0,707$$

A suitable range for V_m is V_{cc}/2 to V_{cc}.


The setting of speed is done with an external clock signal at the digital input "Clk". It is calculated from the number of pole pairs p and the clock frequency f_{clk} to:

$$n = f_{\text{clk}} / (48 \cdot p)$$


The direction of rotation of the motor can be reversed with the digital input "Dir".

Dimensional drawing

Scale enlarged

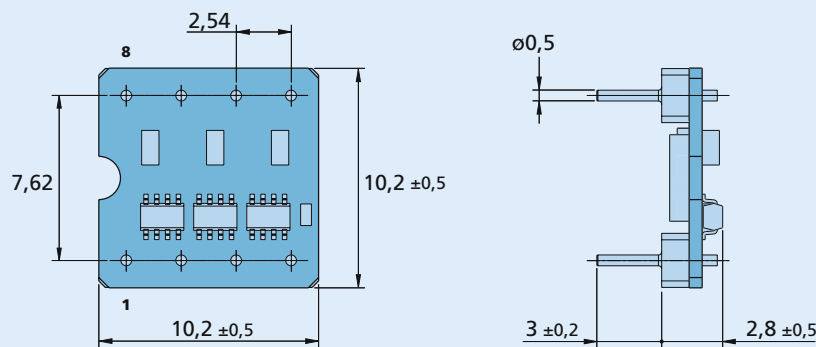

BLD 05002 S



Connection

Pin	Description
1	V _m
2	Clk
3	Dir
4	GND
5	Phase A
6	Phase B
7	Phase C
8	V _{cc}