

# DC-Gearmotors

Precious Metal Commutation  
with integrated Encoder

## 100 mNm

For combination with  
Drive Electronics:  
SC 1801

### Series 2619 ... SR ... IE2-16




	2619 S	006 SR	012 SR	024 SR	IE2-16
Nominal voltage	U <sub>N</sub>	6	12	24	Volt
Terminal resistance	R	7,9	30,8	115	Ω
Output power	P <sub>2 max.</sub>	1,11	1,14	1,22	W
No-load speed (motor)	n <sub>0</sub>	6 700	6 900	7 200	rpm
Speed constant	k <sub>n</sub>	1 130	582	304	rpm/V
Back-EMF constant	k <sub>E</sub>	0,884	1,72	3,29	mV/rpm
Torque constant	k <sub>M</sub>	8,44	16,4	31,4	mNm/A
Current constant	k <sub>I</sub>	0,118	0,061	0,032	A/mNm
Slope of n-M curve	Δn/ΔM	1 060	1 090	1 110	rpm/mNm
Rotor inductance	L	420	1 600	5 800	μH
Rotor inertia	J	0,68	0,68	0,68	gcm <sup>2</sup>

Housing material	plastic		
Geartrain material	metal		
Backlash, at no-load	≤	4	°
Bearings on output shaft		brass / ceramic bearings (standard)	ball bearings (optional)
Shaft load max.:			N
– radial (5 mm from mounting face)	≤	3,5	10,5
– axial	≤	2	5
Shaft press fit force, max.	≤	10	10
Shaft play:			
– radial (5 mm from mounting face)	≤	0,07	0,03
– axial	≤	0,25	0,25
Operating temperature range		– 30 ... + 80 °C	

### Specifications

reduction ratio (rounded)	output speed up to n <sub>max</sub> rpm	weight with motor g	output torque		direction of rotation (reversible)	efficiency %
			continuous operation M <sub>max</sub> mNm	intermittent operation M <sub>max</sub> mNm		
8 : 1	635	25	9	30	=	81
22 : 1	223	26	23	75	≠	73
33 : 1	151	26	30	100	=	60
112 : 1	44	27	93	180	≠	59
207 : 1	24	27	100	180	=	53
361 : 1	14	27	100	180	=	53
814 : 1	6	28	100	180	=	43
1 257 : 1	4	29	100	180	=	43

Orientation with respect to motor terminals ±10°  
3x M2 3,5 deep      3x ø 1,48 4 deep

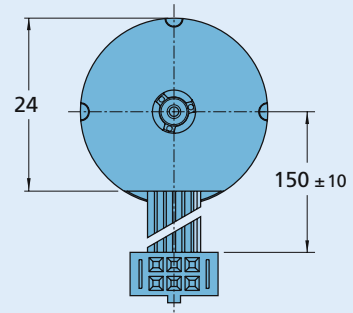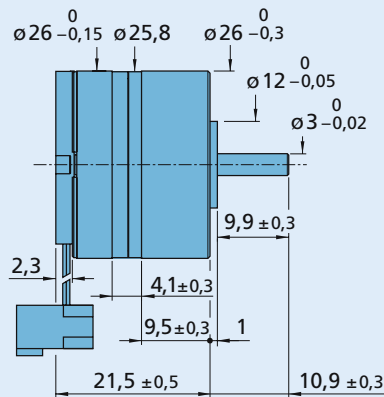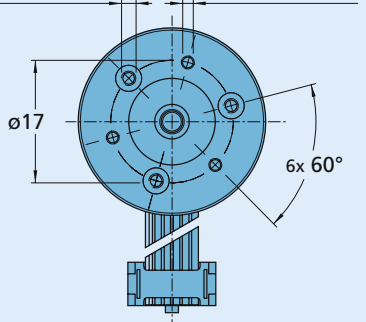

M 1:1

2619S ... SR ... IE2-16

Integrated optical Encoder		IE2-16	
Lines per revolution	N	16	
Signal output, square wave		2	channels
Supply voltage	U <sub>DD</sub>	3,2 ... 5,5	V DC
Current consumption, typical (U <sub>DD</sub> = 5V DC)	I <sub>DD</sub>	typ. 8, max. 15	mA
Output current, max. allowable (at U <sub>out</sub> < 1,5V)	I <sub>OUT</sub>	5	mA
Pulse width <sup>1)</sup>	P	180 ± 45	°e
Phase shift, channel A to B <sup>1)</sup>	Φ	90 ± 45	°e
Signal rise/fall time, max. (C <sub>LOAD</sub> = 50 pF)	tr/tf	2,5/0,3	µs
Frequency range <sup>2)</sup> , up to	f	4,5	kHz
Operating temperature range		0 ... +70	°C

<sup>1)</sup> Ambient temperature 22°C (tested at 1kHz)

<sup>2)</sup> Velocity (rpm) = f (Hz) x 60/N

#### Features

In this version, the DC-Micromotors have an optical encoder with two output channels. A code wheel on the shaft is optically captured and further processed. At the encoder outputs, two 90° phase-shifted rectangular signals are available with 16 impulses per motor revolution.

The encoder is suitable for the monitoring and regulation of the speed and direction of rotation and for positioning the drive shaft.

The supply voltage for the encoder and the DC-Micromotor as well as the two channel output signals are interfaced through a ribbon cable with connector.

#### Full product description

■ Examples:


2619S0065R 8:1 IE2-16

2619S0245R 1257:1 IE2-16

#### Output signals/Circuit diagram/Connector information

##### Output signals


with clockwise rotation as seen from the shaft end

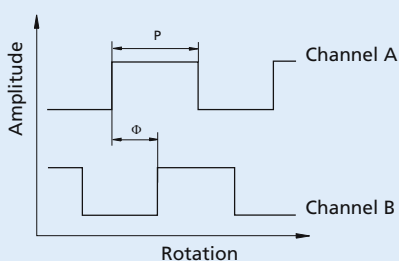

Admissible deviation of phase shift:

$$\Delta\Phi = \left| 90^\circ - \frac{\Phi}{P} * 180^\circ \right| \leq 45^\circ$$

##### Output circuit



\* An additional external pull-up resistor can be added to improve the rise time. Caution: I<sub>OUT</sub> max. 5 mA must not be exceeded!

